

Lifting Platform - LP1000

The Wessex LP1000 is a new concept in lifting platforms, constructed from anti-corrosive anodised aluminium extrusions. Its stylish appearance blends in with the most prestigious surroundings and is suitable for both internal and external applications.

Designed for Total Independence

Rising up to one metre step height, the LP1000 is designed to give total independence. A call station is installed at both upper and lower levels and 'easy to use' controls are fitted inside the car.

Flexibility of design

In order to meet individual applications and requirements, options available include laminated glass infill panels to lift and safety gates (as shown), powered doors, elevating ramp and key control system. (See over).

Robust

The LP1000 is exceptionally robust, lifting a full 300kg, and is therefore suitable for virtually all wheelchairs.

Installation, Instruction and After Sales Care

The lift will be installed by Wessex trained engineers.

A comprehensive user manual, on site training and maintenance advice is provided.

Wessex offer a selection of maintenance contracts to meet individual requirements.




The Specialists in Low Rise Lifting Platforms

 **Wessex**

Lifting Platform - LP1000

Technical details

Dimensions

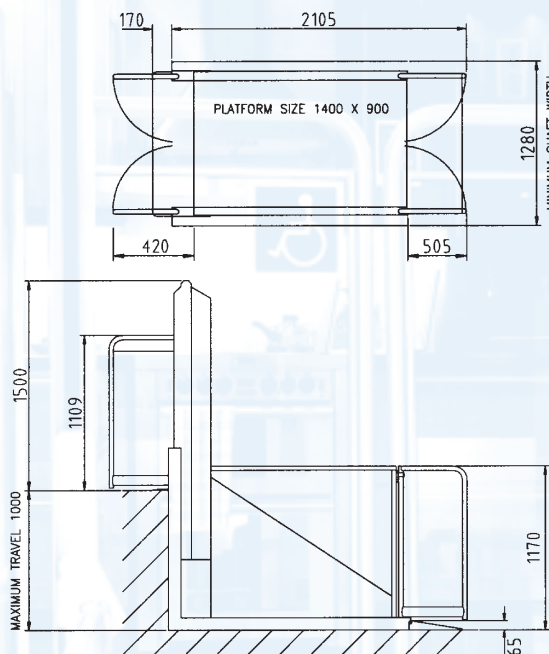

Standard Specification

Fixed ramp to ground at lower level for easy access.

Manual Safety Gates are fitted as standard to the lifting platform and upper threshold. Upper level doors have steel infill and lower gates and side panels are open on standard specification.

Opening and closing of gates is synchronised.

Non-Slip Flooring fitted as standard.

Easy to Use Internal Controls for operator independence.

Automatic Parking at lower level

Call Stations - The lift may be operated from call stations located in convenient positions at both levels.

Battery-backed Lowering fitted as standard for use in the event of a power failure. This may be operated from within the lift.

Manual Over-ride release also fitted in the event of a battery failure.

Safe Working Load - 300kg

Maximum step height - 1 metre

Remote pump box (600x400x210) to be fitted within 8 metres of lift

Options

Powered doors operate automatically when lift is at upper or lower level.

Laminated glass infill on side panels, platform safety gates and safety gates at upper level.

Steel infill on side panels, upper and lower gates available for added protection against vandalism.

Elevating Ramp fitted to the platform ideal if a fixed ramp could be a tripping hazard.

A key control system may be incorporated into the call stations to prevent unauthorised use.

Standards

Conforms to BS 6440:1999 and to the European Standard ISO 9386-1 for Powered Lifting Platforms.



CE Marked in compliance with European Regulations



ISO 9001
FM 58435

LP10 7500 Issue A